

SM-IP2414H - WSFR

2MP IR Starlight Bullet Network Camera



- 2MP (1920 × 1080) @30fps
- Support smart H.265S / H.264S / H.265+ coding
- ICR auto switch, true day / night
- 30 ~ 50m IR night view distance
- Starlight
- Fixed or motorized zoom lens optional
- 3D DNR, true WDR, HLC, BLC, Defog, Smart IR and ROI coding
- Support corridor mode
- Support image distortion correction
- Built-in micro SD card slot
- DC12V/PoE power supply
- IP67 ingress protection
- Support three streams
- P2P function optional
- Support mobile surveillance by smart phones & tablet PCs with iOS and Android OS
- Intelligent analytics



SM-IP2414H - WSFR

2MP IR Starlight Bullet Network Camera


SPECIFICATIONS

Model	SM-IP2414H - WSFR
Specifications	
Camera	
Image Sensor	1 / 2.8 "CMOS
Image Size	1920 × 1080
Electronic Shutter	1 / 25 s ~ 1 / 100000 s
Iris Type	Fixed Iris(fixed lens); DC Iris (motorized lens)
Min. Illumination	0.005 lux@F1.6,AGC ON; 0 lux with IR 0.0028 lux@F1.2,AGC ON; 0 lux with IR
Lens	2.8 mm @F1.6, horizontal field of view: 108° (fixed) 3.6 mm @F1.6, horizontal field of view: 89° (fixed) 2.8~12mm@F1.4, horizontal field of view:103°~32° (motorized)
Lens Mount	M12 or Φ14 optional
Wide Dynamic Range	120dB
BLC	Yes
HLC	Yes
Defog	Yes
Digital NR	3D DNR
Angle Adjustment	Pan: 0°~360°; Tilt:0°~90°; Rotation: 0°~360°
Image	
Video Compression	H.265S / H.264S / H.265+
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile
Resolution	1080P (1920 × 1080), 720P (1280 × 720), D1, CIF, 480 × 240
Main Stream	60Hz : 1080P / 720P(1 ~ 30fps); 50Hz : 1080P / 720P(1 ~ 25fps)
Sub Stream	60Hz : 720P/D1/CIF (1~30fps); 50Hz: 720P/D1/CIF (1~25fps)
Third Stream	60Hz : D1/CIF/480x240 (1~30fps); 50Hz: D1/CIF/480x240 (1~25fps)
Bit Rate	64 Kbps ~ 6 Mbps
Bit Rate Type	VBR / CBR
Audio Compression	G711A / U
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast,Wide Dynamic, Sharpen, NR,etc. adjustable through client software or web browser
ROI	Each ROI to be configured separately
Interfaces	
Network	RJ45
Video Output	No
Audio	1CH audio input
Storage	Built-in micro SD card slot; up to 128GB
Hardware Reset	Yes
Functions	
Remote Monitoring	Web browsing,CMS remote control
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, SNMP, HTTP, 802.1x, UPnP, HTTPs, QoS
Interface Protocol	ONVIF
Storage	Network remote storage; micro SD card storage
Smart Alarm	Motion detection, SD card error, SD card full
Intelligent Analytics	Intrusion· Line Crossing, Exception, Region Entrance, Region Exiting, face detection, People / vehicle counting by line
General function	Watermark, IP address filtering, video mask, heartbeat, password protection, non-photosensitive switch, image distortion correction
PoE	Yes , IEEE802.3af
IR Distance	30 ~ 50 m
Ingress Protection	IP67

Others

Power Supply	DC12V/PoE
Power Consumption	< 9.5W
Operating Environment	- 30 °C ~ 60 °C (-22°F~140°F) Humidity: less than 95 % (non-condensing)
Dimensions (mm)	217.7 × 80.5 × 80.5
Weight (net)	Approx. 0.67KG
Installation	Ceiling mounting; Wall mounting

DIMENSIONS

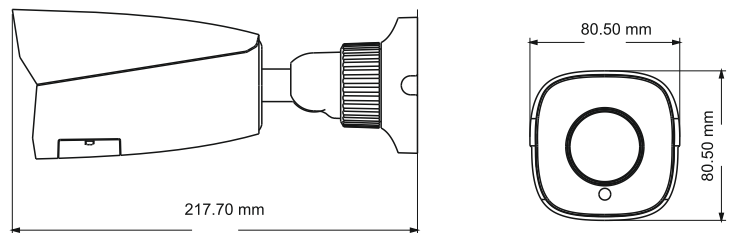

AVAILABLE ACCESSORIES

